

Interlock Tiles

- Soft, resilient and unique lock features are the ideal surface for playground, fitness centre, exhibition halls and etc.
- Integrated connectors allow fast installation with loose lay, no-glue and easy replacement.


PRODUCT SPECIFICATIONS

Material Data

- Description : SBR Safety Recycled Rubber Tiles
 Materials : Top layer – 7-8mm thick of SBR pigmented shred rubber
 Bottom layer – SBR shred rubber with rubber granules
 Method : Both bonded with molded MDI based binder
 Colours Option : Pigmented series, Speckled series, Full EPDM series
 (Refer to color chart code)

Square Tile c/w Pin-Hole

- Shape : Square / Rectangle
 Dimension (mm) : 500 x 500, 500 x 250
 Thickness (mm) : 40 to 75

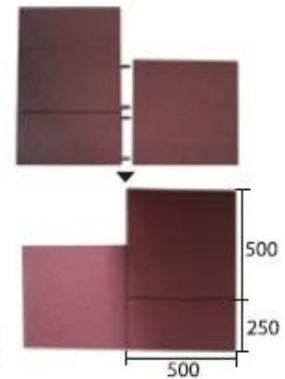

Hexagon Tile

- Shape : Hexagon
 Dimension (mm) : 500 x Hexagon, 300 x Hexagon
 Thickness (mm) : 25 to 75



Technical Data & Physical Test

BS 7188 : 1989 (section 6) – Ease of Ignition
 Extinction of flame : 5 seconds
 Radius of burnt area : 25mm

BS 7188 : 1989 (section 4) - Skid Resistance
 Dry (BPN) : 80 at both 0° & 180°
 Wet (BPN) : 55 at 0° & 50 at 180°

ISO 4662 : 1986 – Rebound Resilience
 Dunlop Resilience : 61% (Room Temperature)

DIN 53571 : 1971
 Tensile Stress-Strain Properties
 Elongation at break : 0.26Mpa, 10kp/cm²

DIN EN 1177 : 2002-03-Impact Attenuation
 Report No : 07799343181 (Tested in TÜV Thüringen GmbH)

Critical Heights	Dimension
2200 mm	500 x 500 x 45mm

MIRROAD reserves the right to make changes without notices.

